

# TECHNICAL SPECIFICATIONS

DESCRIPTION	SPECIFICATION
Max Pressure	10,000 psi (690 Bar)
Zerk Compatibility	Fits all DIN and SAE specification Zerk fittings
Coupler Thread	1/8" NPT female thread
Dimensions	See charts
Diameter (front coupler)	5/8" (16 mm) Fits most recessed Zerks
Weight	<b>Regular:</b> 4 oz (100 g) <b>XL:</b> 6 oz (165 g)
Grease Gun Compatibility	Works with all grease gun types - pneumatic, manual and battery
Seal	Durable nitrile rubber seal for longevity under high pressure
Lock-on Mechanism	Four hardened spring steel jaws are resilient under high pressure
Patented Locking Technology	US Patent #8955544

**A FREE coupler rebuild kit is included with every coupler**

Easily replace the rubber seal and jaws on the LockNLube® Grease Couplers.



Scan this QR Code for more info:



# LOCKNLUBE® GREASE COUPLER


*"Greatest thing since the invention of the aluminum beer can ... won't own a grease gun without it."*

- Chris C.



**The original, and still the best! Don't be fooled by imitations.**

End greasing frustration with the **#1 locking grease coupler** in the world, only from LockNLube.

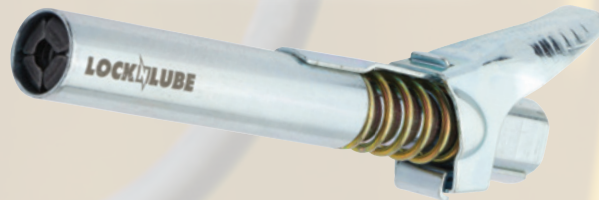

## Over 25,000 Five-Star Reviews online!



*"So much better. Always had problems with the traditional grease gun end fittings. Tried the LockNLube on various sized grease nipples and it works perfectly. Great product and the fact it includes spare parts is a bonus."*

-Mark B.



*"I use the crap out of these things as an industrial mechanic and it is nice to have options that work!"*

-A. S.



*"I bought a competitor's coupler trying to save a buck or two. Could not reach many of my recessed grease fittings because of the size of the coupler's head. Ended up coming back to LockNLube to solve the problem. Locks on tight, releases easily, and I can now get to "all" of the grease fittings. Get one."*

-Vince B.



*"I have not wasted a drop of grease!!! I have greased everything that I have and love this product!!!!!"*

-Tim R.



**LOCKNLUBE®  
GREASE COUPLER**

**Save Time  
Save Money  
Save Grease**

# LOCKN LUBE®

## GREASE COUPLER

- ✓ WON'T LEAK OR POP OFF UNDER PRESSURE – GUARANTEED
- ✓ THE WORLD'S ONLY REBUILDABLE GREASE COUPLER

Easily disconnects, even under pressure. No more broken Zerk's

Works on all Zerk fittings, SAE and metric

1/8" NPT female thread compatible with all grease types – pneumatic, manual, and battery

Rated up to 10,000 PSI

The LockNLube® Grease Coupler doesn't pop off, doesn't leak, and easily releases with a thumb lever, even at extreme pressures. LockNLube has changed the way you connect to Zerk fittings with a patented sliding sleeve to lock the four hardened steel jaws onto the Zerk, creating a leak-free seal.



**Locks on.  
Stays on.  
Won't leak.**

No hands are needed to hold or align the coupler. You have both hands free to use your grease gun and know that grease is going in, not on, the machine.


Stuck on couplers are a thing of the past. Just push down the thumb lever on your LockNLube® Grease Coupler, and it comes right off, even on recessed fittings.




Want to learn more? Explore our entire line of greasing, fencing, and air tools at [www.locknlube.com](http://www.locknlube.com).

### Two Sizes Available

The LockNLube® Grease Coupler comes in two sizes, Regular and XL. Both have a barrel that is just 1mm wider than standard four-jaw couplers. The XL version is two inches longer, giving you extra reach for deeply recessed fittings.

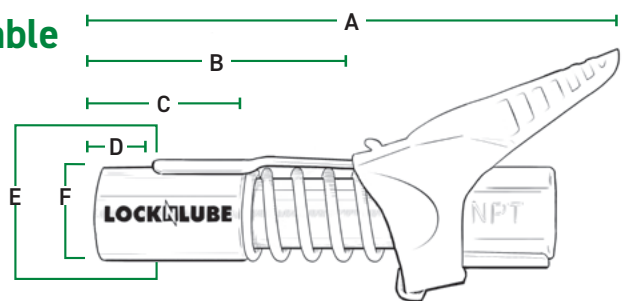

COUPLER	UNIT	A	B	C	D	E	F	G
GREASE COUPLER GC81011	in	3.45	1.68	1.04	0.36	0.68	0.63	1.80
	mm	87.7	42.7	26.4	9.1	17.2	16	45.7

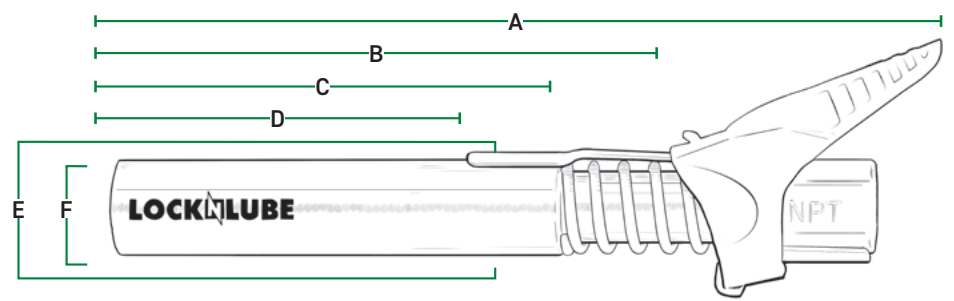

COUPLER	UNIT	A	B	C	D	E	F	G
XL GREASE COUPLER GC81042	in	5.39	3.64	2.96	2.32	0.68	0.63	1.80
	mm	136.9	92.5	75.3	58.9	17.2	16	45.7

**BE SURE TO EXPLORE OUR COMPLETE LINE OF GREASING, FENCING, AND AIR TOOLS:**

### GREASE GUNS



### GREASE BUSTER®



### GREASING ACCESSORIES



**LOCKN LUBE** GREASING TOOLS **LOCKN FLATE** AIR TOOLS

